

CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE, WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP



Lead Free
AS 3718
WM 30023
CASA LUSSO



Brushed Nickel
SPD122-BN



Matte Black
SPD122-MB



Brushed Brass
SPD122-BB



Gunmetal
SPD122-GM

GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter, or amend this warranty offer in writing at any time.

FEATURES

Product Code: SPD122-BN / SPD122-MB
SPD122-BB / SPD122-GM

Premium Warranty (Domestic Use) :

15 year Ceramic cartridge replacement only
7 year Replacement products and parts¹
1 year labour²

Material: SUS304 Stainless Steel

WELS: WELS 6 Star, 4.5 litres per minute


This product complies with the requirements of Lead-Free standards as defined in the National Construction Code Volume 3 and is suitable for use as part of Lead-Free Installation.

¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc
All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

CASA LUSO

SPIN Pull Down Sink Mixer - Installation Instructions

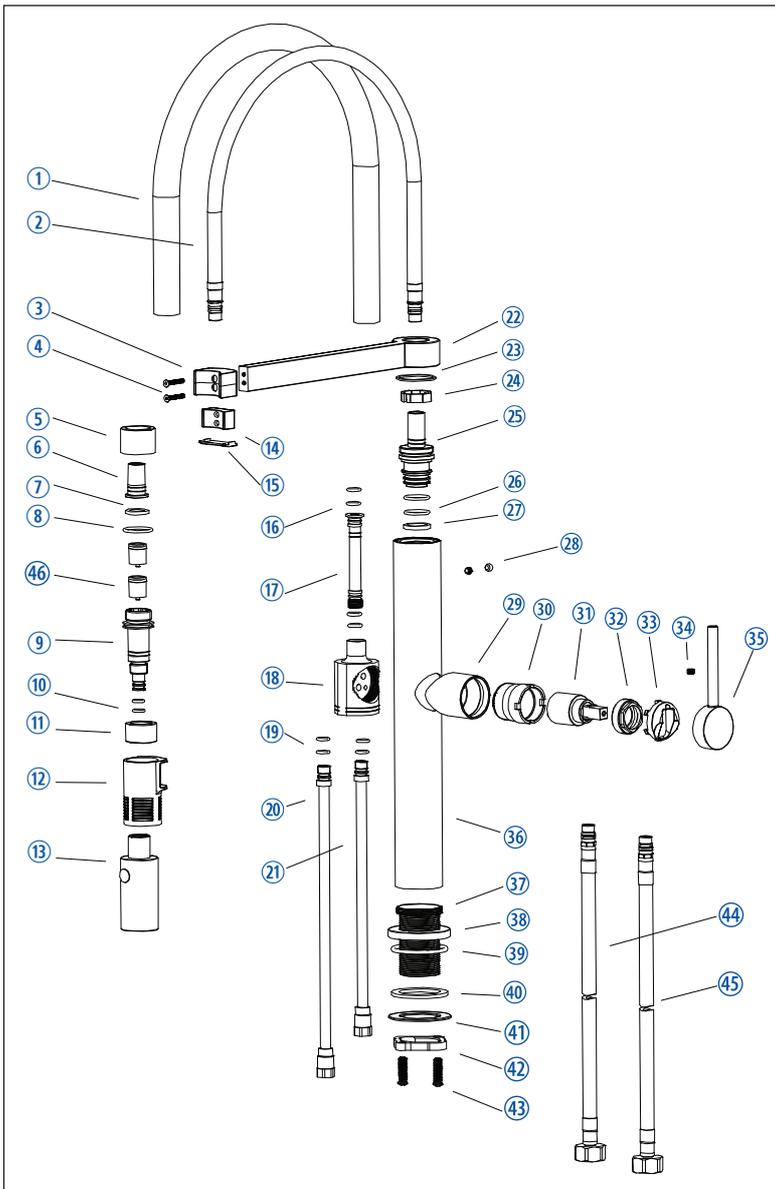

CONTENTS

① Silicon Gel Pipe	②④ Washer
② Hose	②⑤ Bush
③ Magnet Seat	②⑥ O-Ring
④ M3*10 Screw	②⑦ Washer
⑤ Union Nut	②⑧ Plug Bottom Kit
⑥ Bush	②⑨ Bush
⑦ Washer	③⑩ Bush
⑧ O-Ring	③① Valve
⑨ Bush	③② Nut
⑩ O-Ring	③③ Bonnet
⑪ Round Iron	③④ M5*4 Screw
⑫ Connecting Sleeve	③⑤ Handle
⑬ Spray	③⑥ Valve Body
⑭ Magnet	③⑦ Shank
⑮ Escutcheon	③⑧ Base Escutcheon
⑯ O-Ring	③⑨ O-Ring
⑰ Connect	④⑩ Washer
⑱ Valve Body	④① Washer
⑲ O-Ring	④② Nut
⑳ Inlet Assy	④③ Screw
㉑ Inlet Assy	④④ Inlet Hose (Cold)
㉒ Bracket	④⑤ Inlet Hose (Hot)
㉓ Washer	④⑥ Check Valve

INSTALLATION

1. Install the flexible hoses into the mixer and hand tighten in place. The flexible hoses are to be fitted into the correct inlets for hot water and for cold water (Red band for hot and blue band for cold).

DO NOT USE SPANNER TO TIGHTEN AS IT CAN DAMAGE THE O RING

2. Place the mixer into position and secure using the horse shoe and fixing nut.

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

3. Ensure gauze strainers are placed into the flexible hoses then connect the isolating taps.

IMPORTANT

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150 – 500 kPa
- New Regulation:
500 kPa maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C.

ALL INSTALLATIONS MUST COMPLY WITH AS/NZS3500

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES