


Separate Diverter Body - Installation Instructions

Product Code - DB-SS

**CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE.
WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY
FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE
HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.**

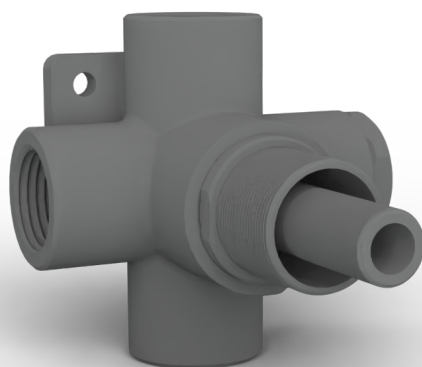

DB-SS - Separate Diverter Body



GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter/ amend this warranty offer in writing at any time.

FEATURES

Premium Warranty (Domestic Use):
7 year Replacement products and parts¹
1 year parts & labour²

Material: Stainless Steel 304 Construction

**ALL INSTALLATIONS MUST COMPLY
WITH AS/NZS3500**


**This product complies with the requirements
of Lead-Free standards as defined in the
National Construction Code Volume 3 and
is suitable for use as part of Lead-Free
Installation.**

¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc. All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

Separate Diverter Body - Installation Instructions

Product Code - DB-SS

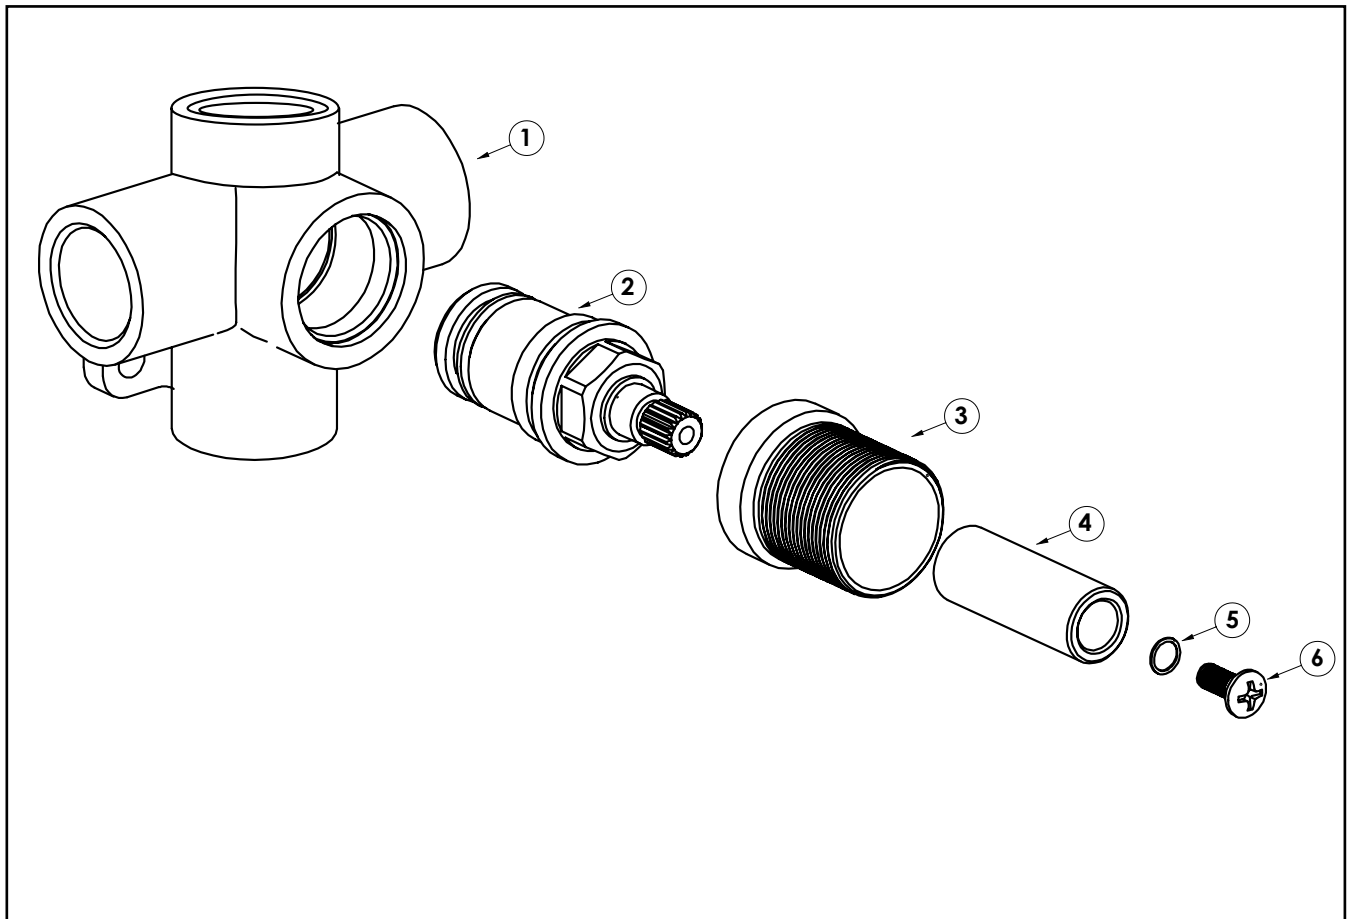

CONTENTS

1	Diverter Body	4	Sleeve
2	Cartridge	5	Washer
3	Adaptor	6	Screw

IMPORTANT

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150-500kPA
- Regulation:
500kPA maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

Separate Diverter Body - Installation Instructions

Product Code - DB-SS

INSTALLATION

1. The thickness of your Tile/Glue/Sheet should be calculated prior to installation; it is suggested that a Nogging should be set 40mm behind the face of wall stud will give you a Tile/Glue/Sheet thickness variance of 18-22mm.

2. Level the diverter body and fix using screws to Nogging, making sure the diverter is aligned square.

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE DIVERTER

IMPORTANT




- Do NOT use plumbers or teflon tape on brass connections with Stainless Steel in-wall bodies. We recommend LOXEAL 58-11 Anaerobic Thread Sealant.
- Do NOT over tighten the brass connections to the in-wall body. As stainless steel is stronger than brass it may damage the brass connections.

3. While there is construction in process after diverter body is installed, we recommend removal of the dress finishing's (i.e handle etc) until final fit off to ensure the finishing's aren't scratched or damaged by trades. The nominated hole cut out for the tiler should be 34mm diameter.

4. For fit off, screw on the dress ring and place handle over to assess fit, if the handle can be pushed back to 1-2mm from finished wall then tighten the Hex Key to fit, if not cut the threaded brass sleeve to suit required length.

5. Re-install Handle onto diverter body with grub screw facing down, central to left and right hand rotation.



6. Turning handle to the left transfers water to the left hand outlet while turning to the right transfers water flow to the right hand outlet.

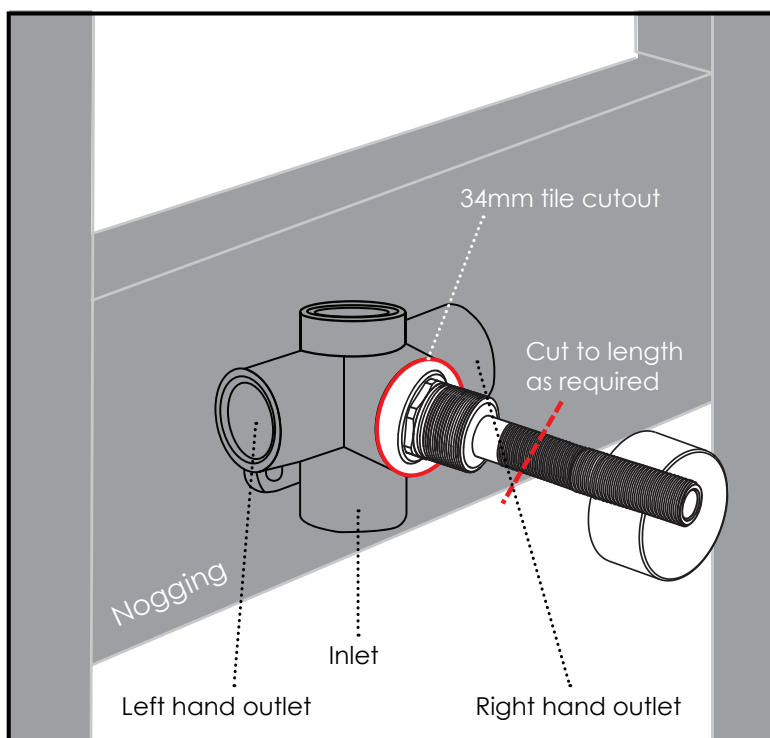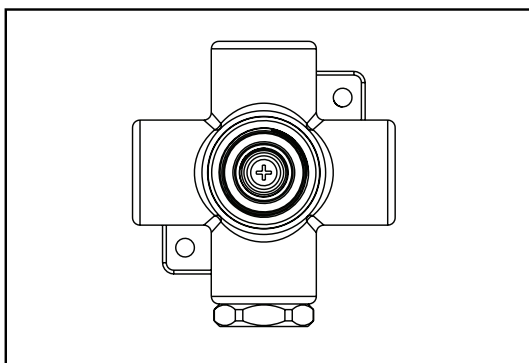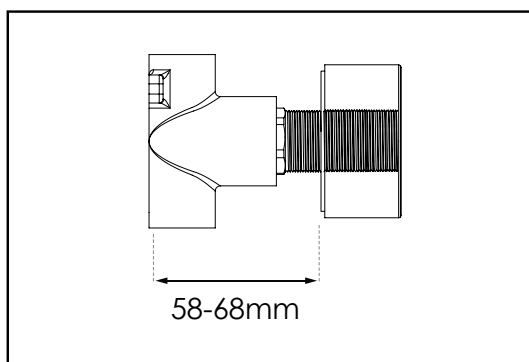

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

Separate Diverter Body - Installation Instructions

Product Code - DB-SS

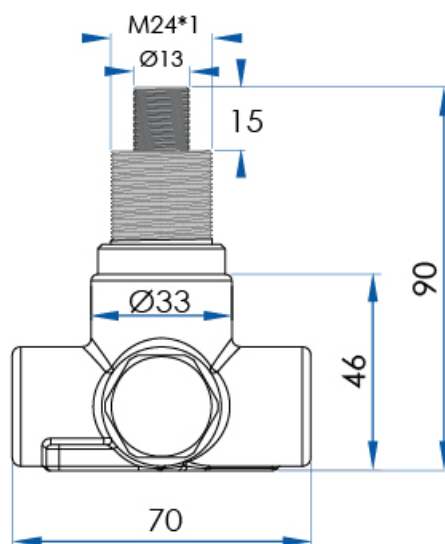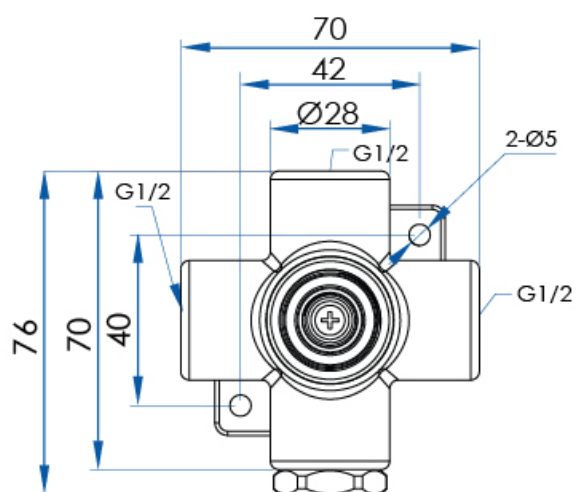

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES