

SYMMETRY Hob Mixer - Installation Instructions

Product Codes - SYM152

CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE. WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.



SYM152 - Hob Mixer



Gunmetal



Brushed Nickel



Champagne Gold



Polished Stainless Steel



Titanium Bronze



Brushed Champagne Gold



WARRANTY

GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter/ amend this warranty offer in writing at any time.

FEATURES

Premium Warranty (Domestic Use):

15 year Ceramic cartridge replacement only
7 year Replacement products and parts¹
1 year parts & labour²

Material: Stainless Steel 304 Construction

ALL INSTALLATIONS MUST COMPLY WITH AS/NZS3500


This product complies with the requirements of Lead-Free standards as defined in the National Construction Code Volume 3 and is suitable for use as part of Lead-Free Installation.

¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc. All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

SYMMETRY Hob Mixer - Installation Instructions

Product Codes - SYM152

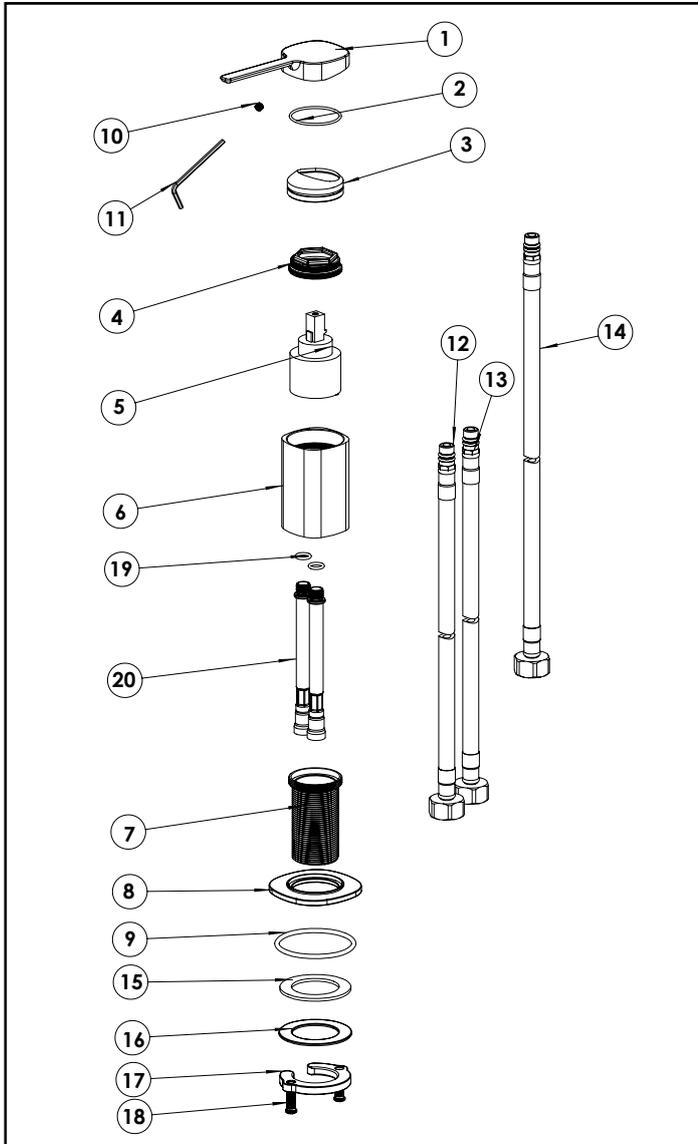

INSTALLATION

1. Install Mixer body into suitable hole 32-36mm. If there is construction in process after mixer body is installed, we recommend removal of the handle until final fit off to ensure the handle isn't scratched or damaged by trades.

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER

2. Underneath the hob/bench, tighten the brass fixing nut over the rubber washer, hand tighten with spanner, then hand tighten both fixing screws further with Philips Head screwdriver.

3. All Flexi tails should be Hand tightened to Mixer first (Red band to H, Blue band to C). The third 'outlet hose' being tightened to the spout outlet last.

4. Ensure there are no Kinks in hoses after final tightening.

5. For fit off, re-install Handle on to mixer body positioning the off (•) symbol to the back of the mixer.


CONTENTS

1	Handle
2	O ring 36*1.5
3	Decoration cap
4	Gland
5	35mm Wanhai cartridge
6	Cartridge base
7	Shank
8	Base
9	O ring 56*3
10	M5*4 screw
11	2.5mm allen key
12	M10-G1/2 40cm PEX blue inlet hose
13	M10-G1/2 40cm PEX red inlet hose
14	M10-G1/2 50cm PEX outlet hose
15	Gasket
16	Gasket
17	M32*1.5 screw
18	M6*20 screw
19	O ring 11*1.8
20	110mm inlet tube

IMPORTANT

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150-500kPA
- Regulation:
500kPA maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C

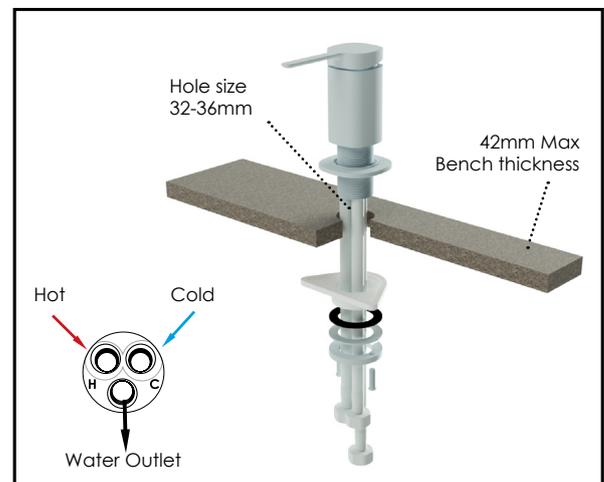

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES