

CASA LUSSO

SYMMETRY Freestanding Bath Spout Mixer - Installation Instructions

Product Code - SYM155 - Suits FSPM-FB – Floor Body

CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE. WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.



Gunmetal



Brushed Nickel



Champagne Gold



Polished Stainless Steel



Titanium Bronze



Brushed Champagne Gold



SYM155 - Freestanding Bath Spout Mixer



Lead Free
AS 3718
WM 30023
CASA LUSSO



WARRANTY

GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter/ amend this warranty offer in writing at any time.

FEATURES

Premium Warranty (Domestic Use):

7 year Replacement products and parts¹
1 year parts & labour²

Material: Stainless Steel 304 Construction

ALL INSTALLATIONS MUST COMPLY WITH AS/NZS3500


This product complies with the requirements of Lead-Free standards as defined in the National Construction Code Volume 3 and is suitable for use as part of Lead-Free Installation.

¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc. All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

SYMMETRY Freestanding Bath Spout Mixer - Installation Instructions

Product Code - SYM155 - Suits FSPM-FB – Floor Body

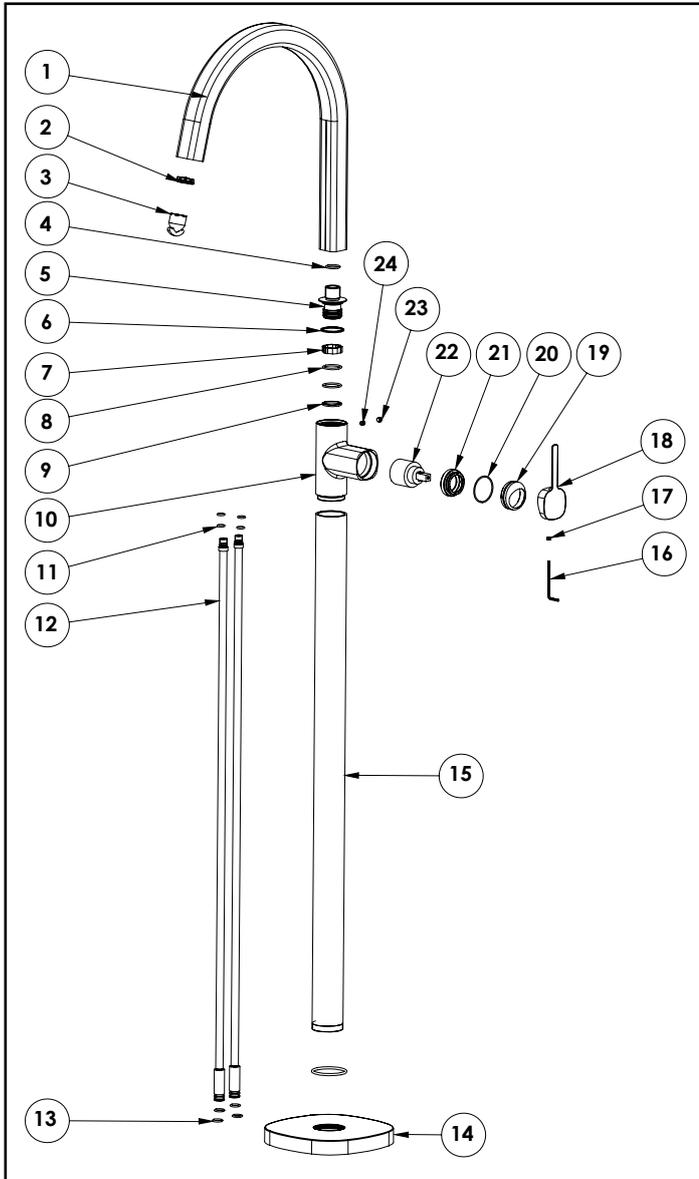

CONTENTS

1	8050366 spout
2	M24 Neoperl areator
3	Wrench
4	O ring 20*2
5	Joint
6	Wearing ring 31*28*1.6
7	Position ring 27*21*7
8	O ring 26*2
9	Wearing ring 26*23*2
10	8050366 body
11	O ring 11*2
12	785mm inlet tube
13	O ring 14*2
14	8050366 decoration cap
15	straight tube
16	2.5mm allen key
17	M5*3 screw
18	handle
19	8030128 decoration cap
20	O ring 37*1.5
21	Locking Nut
22	gland M37*1.2535mm Wanhai cartridge
23	5.5mm decoration button
24	M5*6 screw

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER

IMPORTANT

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.


- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150-500kPA
- Regulation:
500kPA maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

Freestanding Bath Spout Mixer Floor Body - Installation Instructions

Product Code - FSPM-FB

**CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE.
WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY
FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE
HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.**

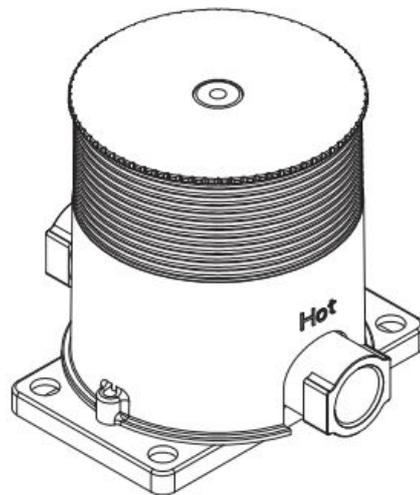

FSPM-FB - Freestanding Bath Spout Mixer Floor Body



GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter/ amend this warranty offer in writing at any time.

FEATURES

Premium Warranty (Domestic Use):
7 year Replacement products and parts¹
1 year parts & labour²

Material: Stainless Steel 304 Construction

**ALL INSTALLATIONS MUST COMPLY
WITH AS/NZS3500**

This product complies with the requirements of Lead-Free standards as defined in the National Construction Code Volume 3 and is suitable for use as part of Lead-Free Installation.


¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc. All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

CASA LUSSO

Freestanding Bath Spout Mixer Floor Body - Installation Instructions

Product Code - FSPM-FB

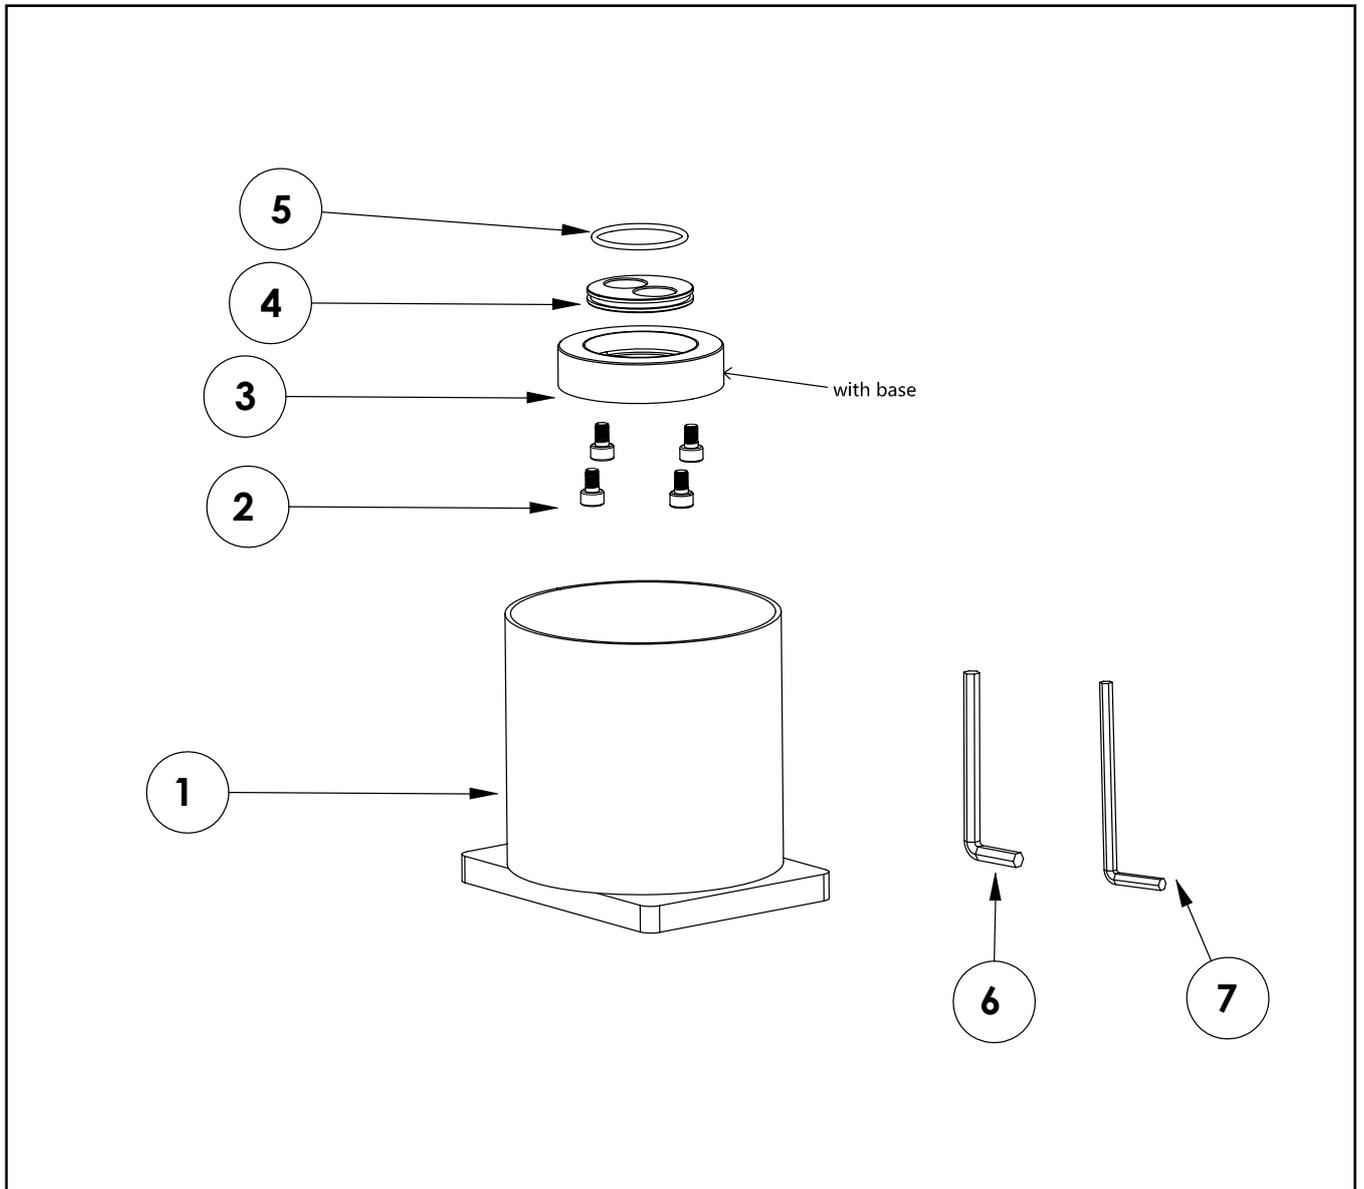

CONTENTS

- | | |
|---|---------------|
| 1 | Base |
| 2 | M5*8 screw |
| 3 | joint |
| 4 | position ring |
| 5 | O ring 31*1.5 |
| 6 | 5mm allen key |
| 7 | 4mm allen key |

IMPORTANT


IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150-500kPa
- Regulation: 500kPa maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C



IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES


INSTALLATION - Concealed Floor Body

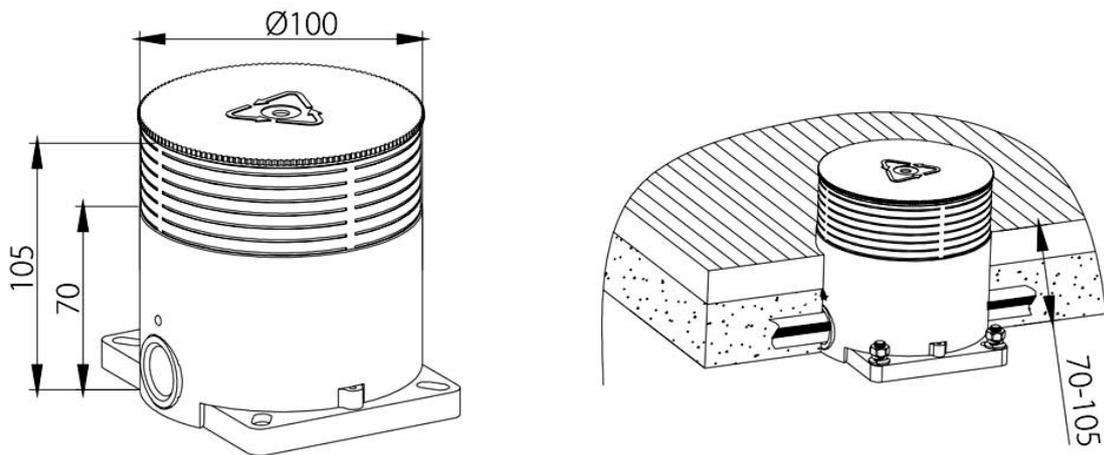


1. Depth 70-105mm (Contains the floor tile), properly lift the height of the blank floor.

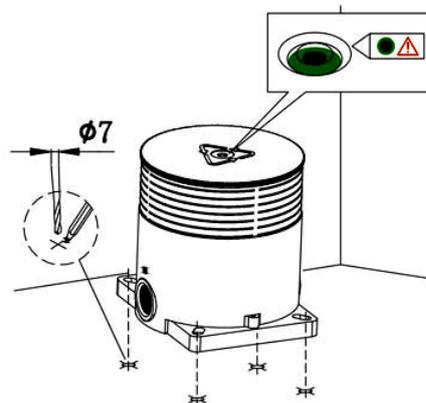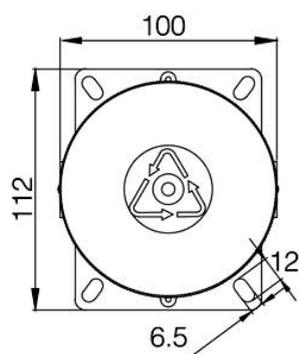

2. Draw lines and drill holes, and place the embedded parts in horizontal position.

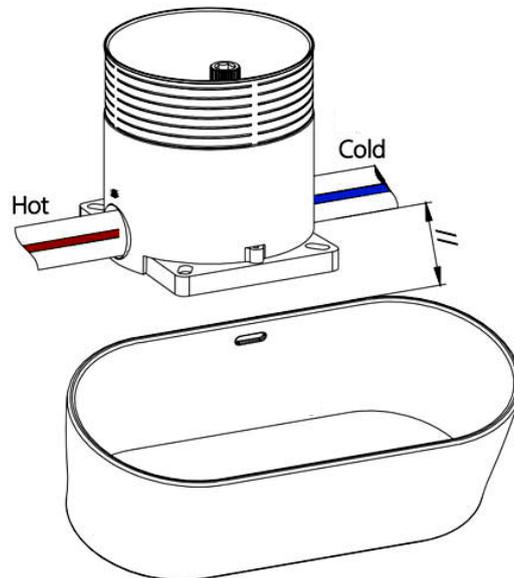

3. Ensure that the direction of the cold and hot inlet pipe of the embedded box is balance with the bathtub.

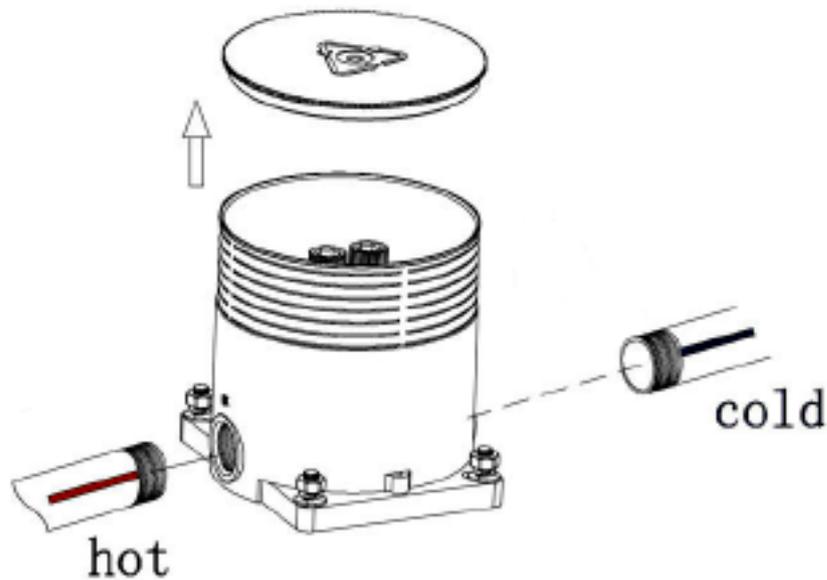


4. Connect the cold and hot water pipes.


IMPORTANT

- Do NOT use plumbers or teflon tape on brass connections with Stainless Steel in-wall bodies. We recommend LOXEAL 58-11 Anaerobic Thread Sealant.
- Do NOT over tighten the brass connections to the in-wall body. As stainless steel is stronger than brass it may damage the brass connections.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

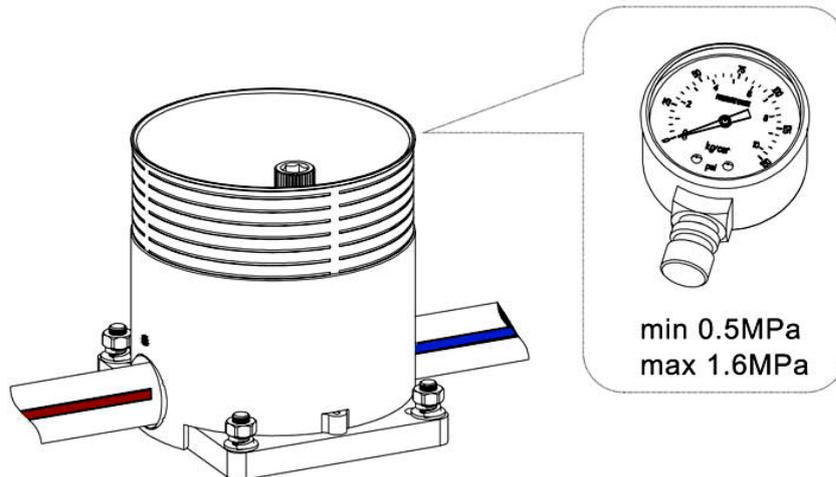


5. Carry out a seal test to ensure there is no leakage.

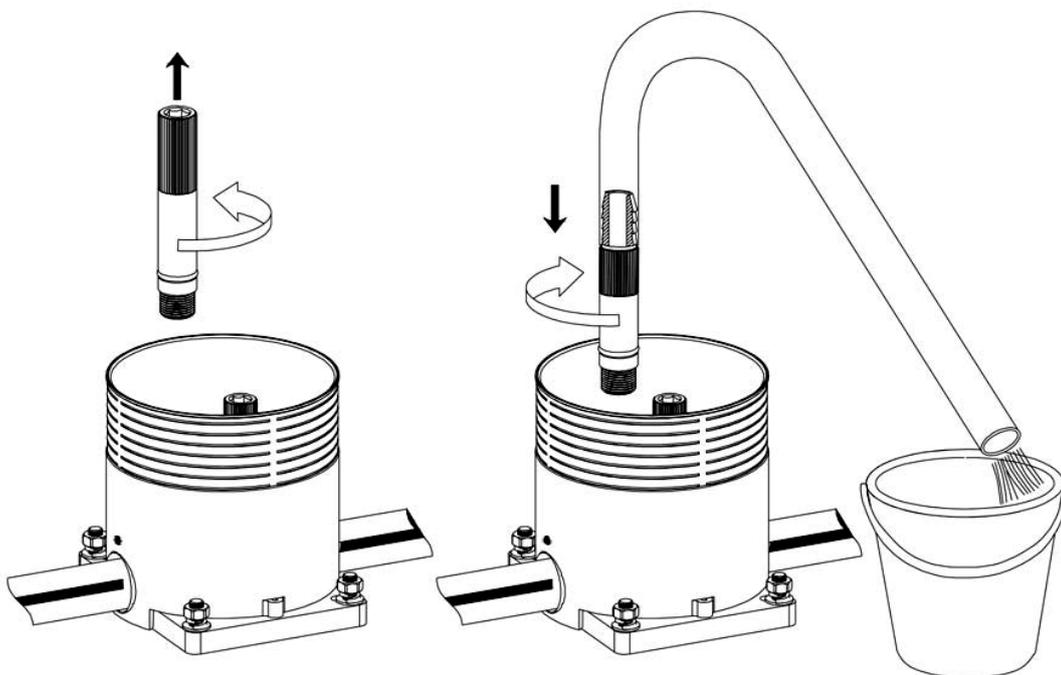


6. Screw out in turn drain plug, attach the drain connector, open the inlet valve, the internal channel of the embedded box is flushed clean.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

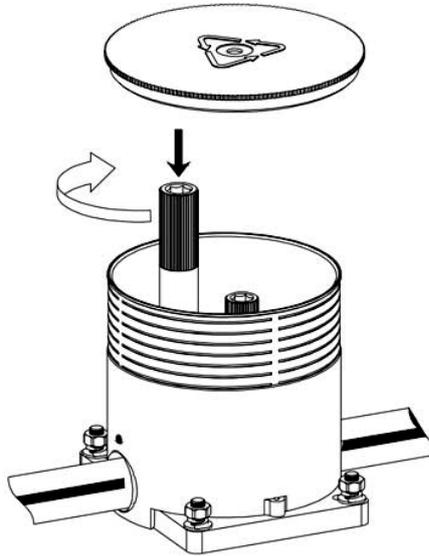


7. Screw in space drain plug and replace lid cover.

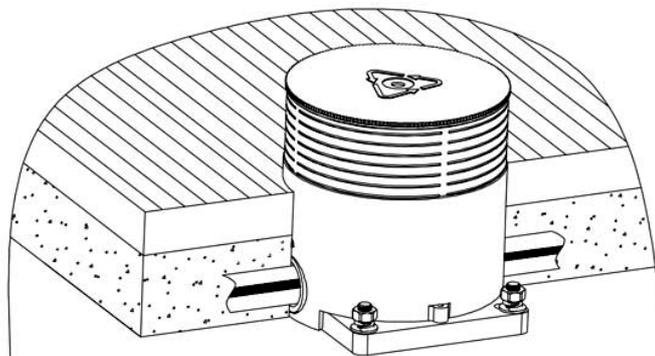


8. Finished installation

INSTALLATION - Freestanding Mixer


1. Open the embedded box cover.




2. Remove the plate and plug by hexagon screw.

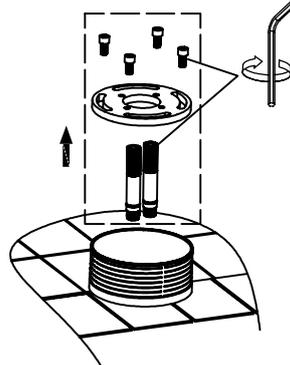


3. Cutting the embedded box along the tiles surface by knife.




4. Install the escutcheon from the up of the tube; Connect the inlet pipes to the body by hexagon screw.




5. Connect the straight tube to the body.




6. Connect the plate to the tube through the screws by hexagon screw.



7. Put the inlet pipes into the relative holes of the embedded box; Adjust the position of the spout and bath; Connect the plate into the embedded box through the plate screws.



8. Install the hand shower and shower hose.

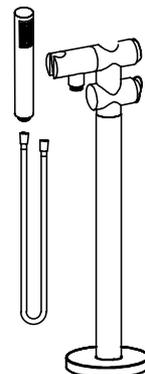

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES